
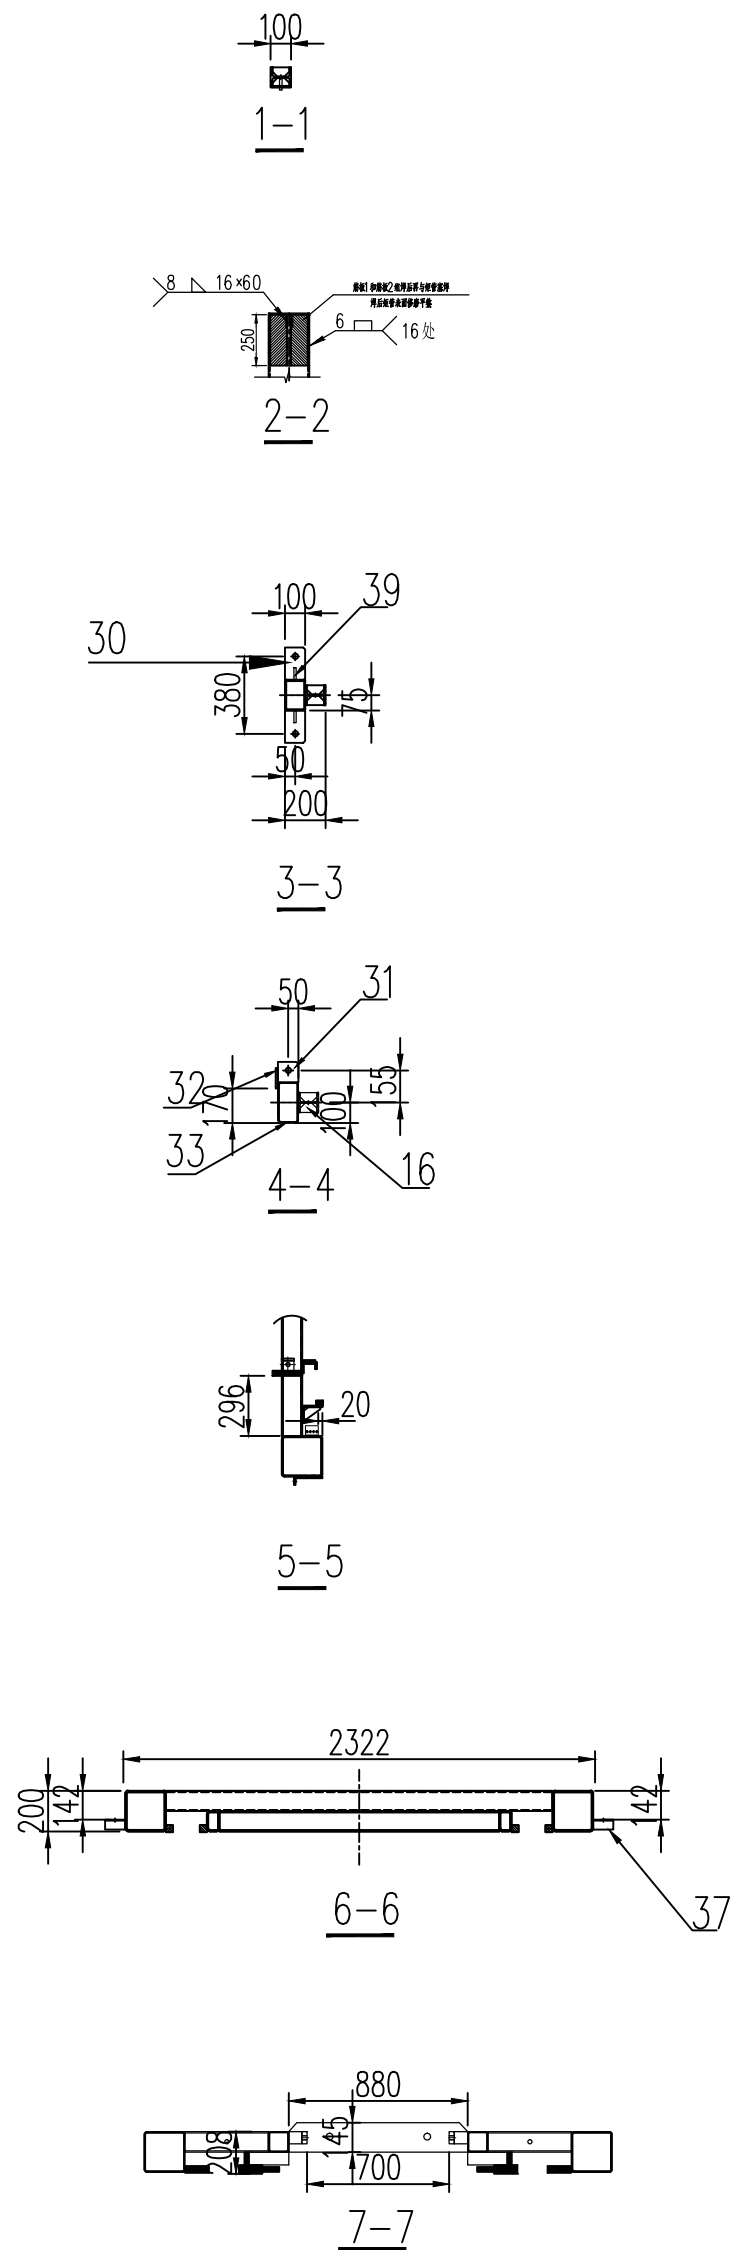


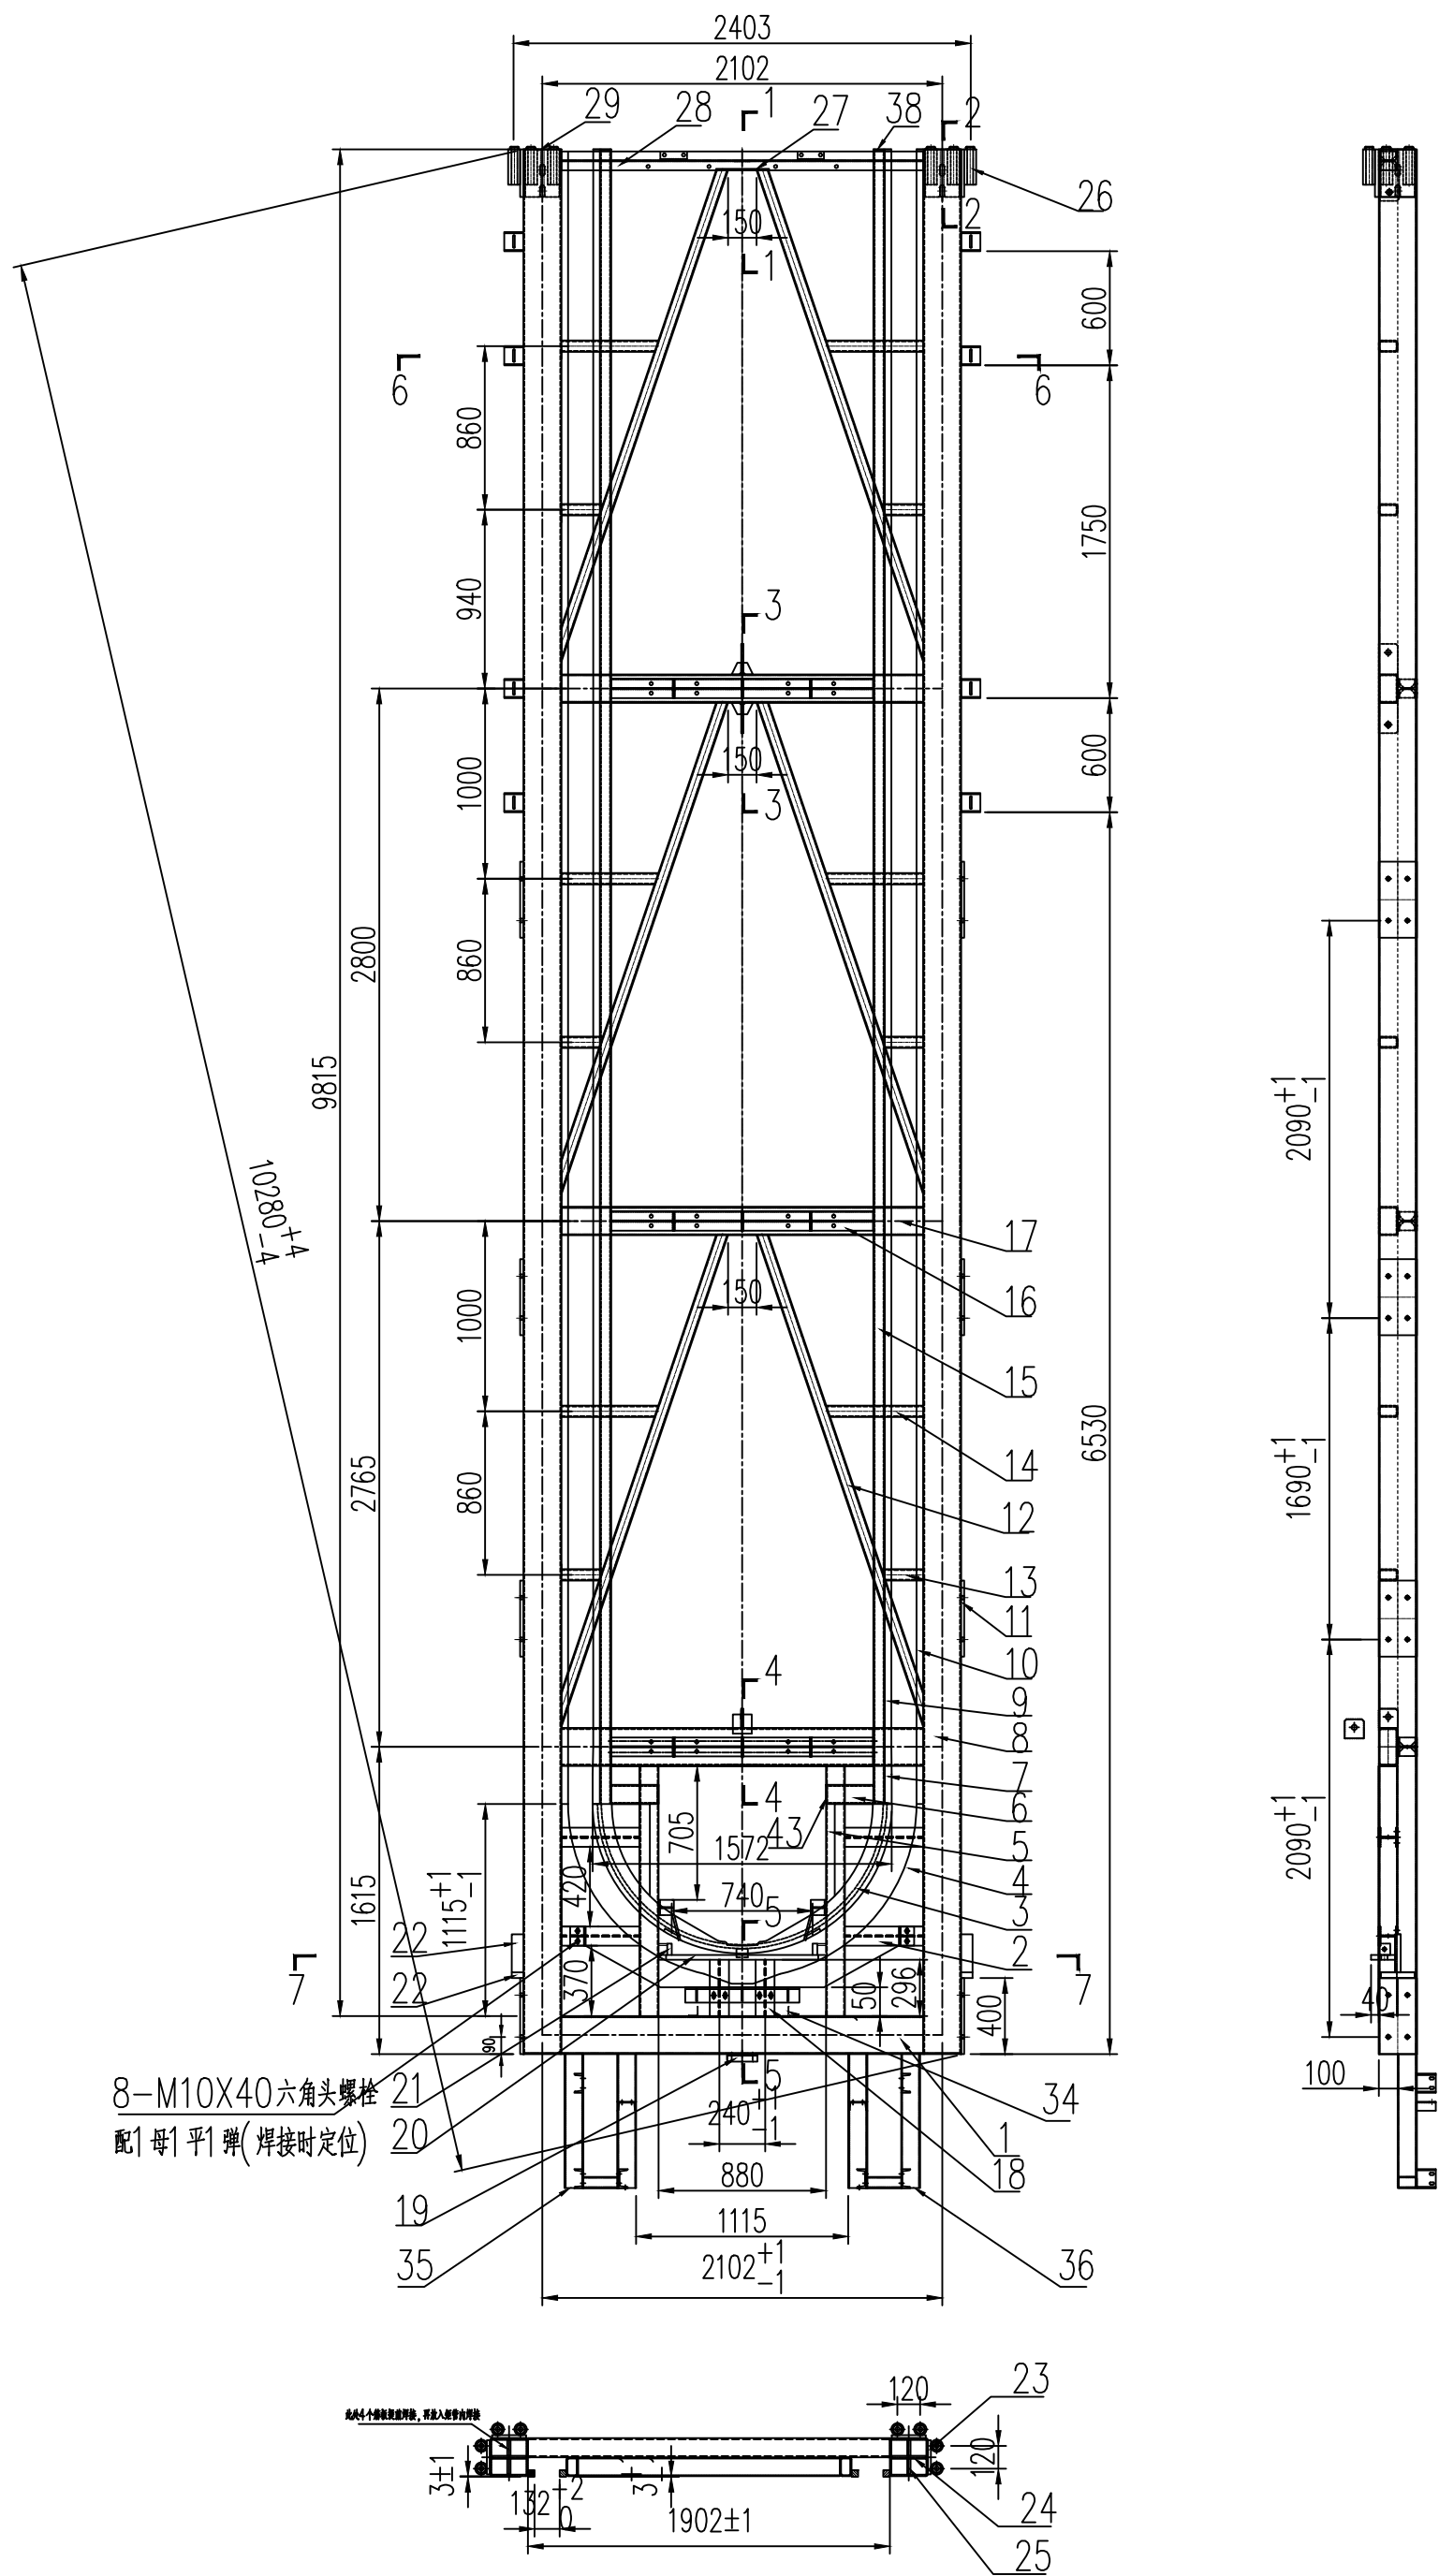

- 技术要求:
1. 表面处理: 喷漆前除锈要除干净, 金属表面呈现金属光泽, 不能留有油污锈迹;
 2. 未注公差长度方向按±2mm, 对角线方向±3mm;
 4. 未注明焊高均按厚的80%, 皆为满焊, 焊后校平
 5. 焊接不允许有虚焊、漏焊、夹渣、裂纹等缺陷, 焊接质量满足二级要求;
 6. 焊缝修磨平整、圆滑、无飞边毛刺(特别是死角, 转角交接处焊缝打磨光滑平整以便喷漆时能覆盖到);
 7. 喷漆时注意保护螺孔。

39	PCX9-01-01-03-01-46	斜拉杆连接板筋板	4	
38	PCX9-01-01-03-01-44	封口板2	4	
37	PCX9-01-02-01-4	防摆支架连接槽钢1	8	
36	PCX9-01-02-03-01-02	底部防摆导轨支撑件2	1	
35	PCX9-01-02-03-01-01	底部防摆导轨支撑件1	1	
34	PCX9-01-02-03-01-04	到位传感器支架	2	
33	PCX9-01-01-03-01-32	下片钢架横梁2	1	
32	PCX9-01-01-03-01-34	加强板	1	
31	PCX9-01-02-03-01-03	斜拉杆连接板O4	1	
30	PCX9-01-01-03-01-45	斜拉杆连接钢板2	2	
29	PCX9-01-01-03-01-29	封口板3	4	
28	PCX9-01-01-03-01-28	钢架拼接处H型钢	1	
27	PCX9-01-01-03-01-27	斜撑垫板	1	
26	PCX9-01-01-03-01-26	钢架连接套筒2	8	
25	PCX9-01-01-03-01-25	连接处筋板2	4	
24	PCX9-01-01-03-01-24	连接处筋板1	2	
23	PCX9-01-01-03-01-23	连接套筒衬板	4	
22	PCX9-01-01-03-01-22	定位块1	4	
21	PCX9-01-01-03-01-21	顶块	2	
20	PCX9-01-01-03-01-20	轴承底座	1	
19	PCX9-01-01-03-01-19	底部稳定装置连接板	1	
18	PCX9-01-01-03-01-18	下片钢架导轨依附H型钢2	2	
17	PCX9-01-01-03-01-17	框架中部横梁	2	
16	PCX9-01-01-03-01-16	H型钢横梁1	2	
15	PCX9-01-01-03-01-15	竖向导轨依附钢通1	2	
14	PCX9-01-01-03-01-14	框架斜撑3	6	
13	PCX9-01-01-03-01-13	框架斜撑2	6	
12	PCX9-01-01-03-01-12	框架斜撑1	6	
11	PCX9-01-01-03-01-11	立柱连接钢板	8	
10	PCX9-01-01-03-01-10	竖向外导轨1	2	
9	PCX9-01-01-03-01-9	竖向内导轨1	2	
8	PCX9-01-01-03-01-8	前框架立柱2	2	
7	PCX-01-01-03-01-7	下部导轨连接钢块	2	
6	PCX9-01-01-03-01-6	支撑钢通	2	
5	PCX9-01-01-03-01-5	下片钢架弯弧导轨依附钢通1	2	
4	PCX-01-01-03-01-4	下部外导轨组件	1	
3	PCX-01-01-03-01-3	下部内导轨组件	1	
2	PCX9-01-01-03-01-2	下片钢架弯弧导轨依附H型钢1	4	
1	PCX9-01-01-03-01-1	框架底部横梁	1	

序号	图号	名称	数量	备注
标记	处数	修改日期	签名	
设计		重量/Kg	3181.2	
审核		版本号	A	
批准		比例	1:1	
材料:				焊接件
PCX9-01-02-03-01-01				后片主框架1